


# NXG-208N

Aritech Reliance XR Series 8 zone expander

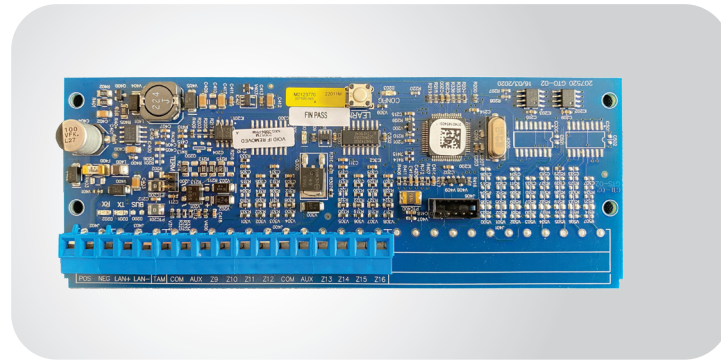

## INCREASING ZONE CAPACITY

The NXG-208N adds by default 8 supervised hardwired zone inputs to the Aritech Reliance XR Series range of panels.

## INSTALLATION

The module comes with a set of card slides allowing the module to be installed in Aritech Reliance XR Series control panel enclosure.

## PROGRAMMING

The NXG-208N does not need specific programming. Enrolling the module and programming the zones is done from the control panel. The firmware of the module is upgradeable remotely via DLX900 software.

## FEATURES

- 8 zone expander for Aritech Reliance XR Series
- Separate box tamper input
- “NetworX/Reliance” form factor
- Firmware upgrade via DLX900 over the network
- EN50131-3 CLASS II GRADE 2, INCERT T031

# NXG-208N

Aritech Reliance XR Series 8 zone expander

National Sales Enquiries  
10 Ferntree Place  
Notting Hill, Victoria 3168  
Phone: 1300 361 479  
Outside Australia: +61 3 9239 1200  
www.fireandsecurityproducts.com.au

## TECHNICAL SPECIFICATIONS

<b>System</b>	
Product line	Aritech Reliance XR Series
Kit	No
<b>Inputs</b>	
Onboard inputs	8
End of line resistor value	3.3K - 6.6K; 4.7K - 9.4K - 19.4K; 4.1K - 8.2K - 16.4K
Tamper input	Normally closed
<b>Communication</b>	
Databus type	RS485
<b>Electrical</b>	
Operating voltage	12.0 to 13.5 VDC (provided by panel)
Current consumption	30 mA (typical)
<b>Physical</b>	
Physical dimension	153 x 57 mm
Shipping weight	60 g
<b>Environmental</b>	
Operating temperature	0 to +49°C
Storage temperature	-34° to 60°C
Relative humidity	85% relative humidity non-condensing
<b>Regulatory</b>	
EN50131 Grade	Grade 2
Compliance	CE
Certification	EN50131 Grade 2, INCERT



Specifications subject to change without notice.  
Carrier Fire & Security Australia Pty Ltd.  
© 2023 Carrier. All rights reserved. All trademarks are the property of their respective owners.

